



**STANDARD
PRESSURE**

IDEAL FOR USE WITH
**AUTO NOZZLE
METER**

GPI > Fuel Transfer Pump


M-1115

Series

**12
GPM**
45 L/min

**115V
AC**

Stationary

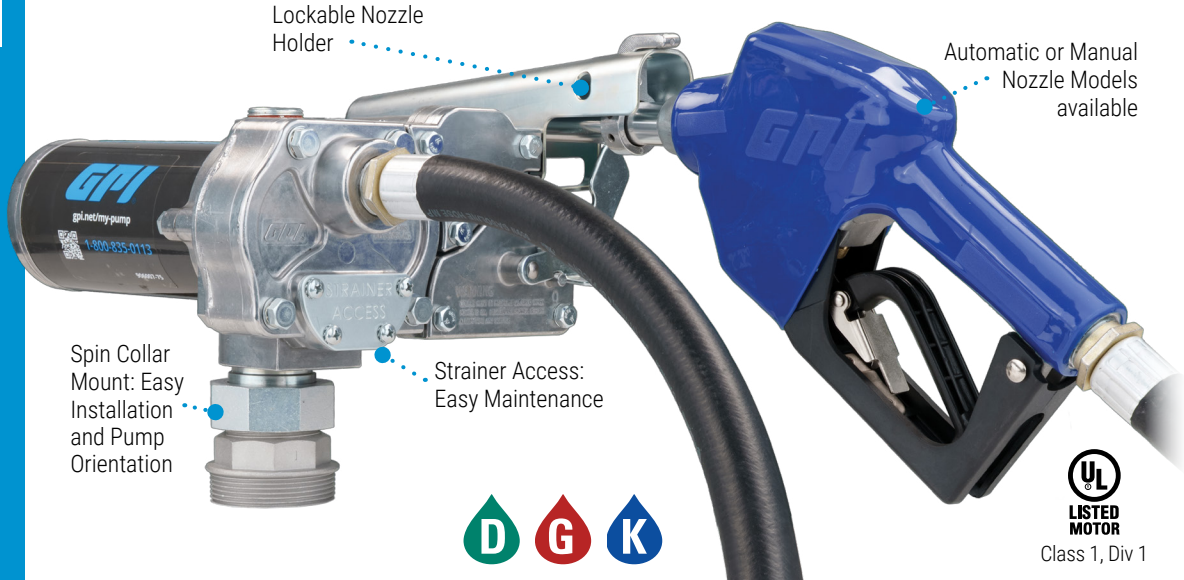


UL
LISTED
MOTOR
Class 1, Div 1

- Extremely long life and trouble-free operation
- Motor is explosion proof

ELECTRICAL	
Input:	115V (ac)
Type:	Rotary Gear
Current Draw:	1.8 amp
Motor:	1400 RPM, 1/8 HP, UL Listed to US and Canadian Standards
PERFORMANCE	
Flow Rate:	12 GPM (45 L/min)
Duty Cycle:	30 min. ON, 30 min. OFF

OPERATING PRESSURE	
15 psi (1.03 bar) - Standard Pressure	
OPERATING TEMPERATURE	
-20°F to 125°F (-29°C to 52°C)	
PUMP HOUSING	
Corrosion-Resistant Diecast Aluminum	
MECHANICAL CONNECTIONS	
Inlet / Outlet:	1 in. NPT / 3/4 in. NPT
Mounting:	2 in. NPT
DISPENSING HOSE	
12 ft. (3.7 m) x 3/4 in.	
SUCTION PIPE	
Telescoping 15 to 40 in. (38.1 to 101.6 cm)	
WARRANTY	
2 Year Pump	

Install our tough M-1115 to your on-site fuel tanks for reliable fueling with minimal maintenance. The M-1115 will be by your side to keep your trucks on the road, your tractor working the fields, or your skid steer loader on the move until the job is finished.

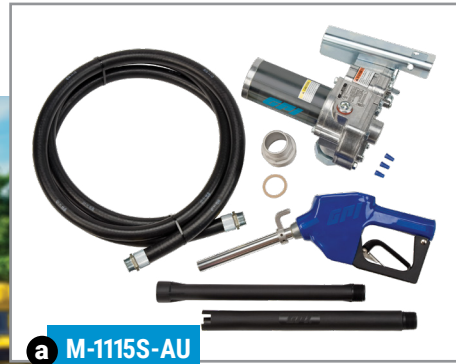

a M-1115S-AU



b M-1115S-MU



c M-1115S-PO

> Ordering Information

	Part No.	Model	Nozzle	Hose	Mount	Suction Pipe	Nozzle Holder
a	110000-82	M-1115S-AU	Automatic	12 ft.	Spin Collar	Included	Lockable
b	110000-81	M-1115S-MU	Manual	12 ft.	Spin Collar	Included	Lockable
c	110000-87	M-1115S-PO	None	None	Spin Collar	None	Lockable

> Compatible Fluids

Designed, tested and approved for use with gasoline blends (up to E15), diesel fuel blends (up to B20) and kerosene.

> Pump Only Models

Additional compatible fluids: pump only models also support the use of aviation gasoline (AVGAS100LL) and kerosene grade (JET A).